

Otis® GR Pulling Tool Slickline Downhole Tools

The Otis GR Pulling Tool is a combination of two assemblies, an Otis GS pulling tool and an Otis GU adapter. When assembling these components, it is vital that the shear pin is removed from the GS pulling tool.


The Otis GR pulling tool is recommended where downward jarring on the sub-surface device is required before pulling. The shear pin in the GU adapter will shear during upward jarring allowing the tool to move to the release mode.

Contact your local Hunting Sales Representative for further technical details

Hunting GR Pulling Tools are available with various connections to suit customer requirements

Spares components are available. Please specify part and assembly part number or part number if known.

(See chart overleaf)

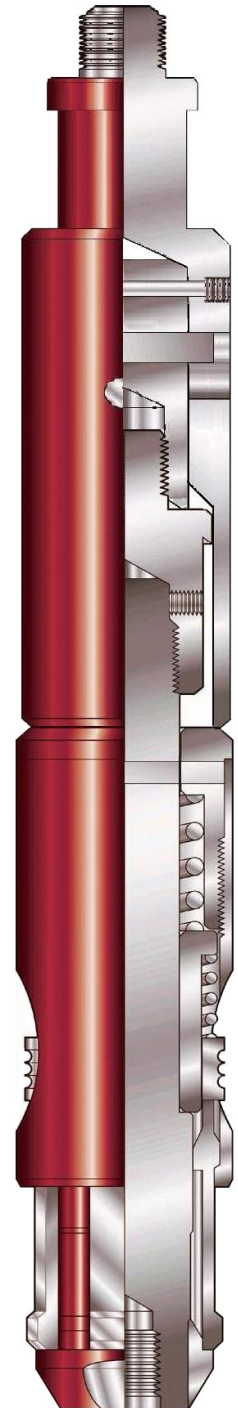



OTIS® GR PULLING TOOL						
Lock Mandrel OD Guide	Fishing Neck ID	Combination Assembly No.	GS Pulling Tool Assembly	GU Adaptor Assembly	Top Thread Connection	Fishing Neck on Tool
1.250"	0.88"	40GR12500	40GS12500	40GU12500	5/8" 11 UN	1.000"
1.375"	0.88"	40GR12500	40GS12500	40GU12500	5/8" 11 UN	1.000"
1.500"	1.06"	40GR15000	40GS15000	40GU15000	15/16" 10 UN	1.187"
1.625"	1.06"	40GR15000	40GS15000	40GU15000	15/16" 10 UN	1.187"
1.710"	1.06"	40GR15000	40GS15000	40GU15000	15/16" 10 UN	1.187"
1.781"	1.38"	40GR17800	40GS17800	40GU17800	15/16" 10 UN	1.375"
1.875"	1.38"	40GR18700	40GS18700	40GU18700	15/16" 10 UN	1.375"
1.900"	1.38"	40GR18700	40GS18700	40GU18700	15/16" 10 UN	1.375"
2.000"	1.38"	40GR18700	40GS18700	40GU18700	15/16" 10 UN	1.375"
2.121"	1.38"	40GR18700	40GS18700	40GU18700	15/16" 10 UN	1.375"
2.188"	1.81"	40GR21800	40GS21800	40GU21800	15/16" 10 UN	1.750"
2.313"	1.81"	40GR23100	40GS23100	40GU23100	15/16" 10 UN	1.750"
2.380"	1.81"	40GR23100	40GS23100	40GU23100	15/16" 10 UN	1.750"
2.500"	1.81"	40GR23100	40GS23100	40GU23100	15/16" 10 UN	1.750"
2.562"	1.81"	40GR23100	40GS23100	40GU23100	15/16" 10 UN	1.750"
2.750"	2.31"	40GR27500	40GS27500	40GU31200	1 1/16" 10 UN	2.313"
2.813"	2.31"	40GR27500	40GS27500	40GU31200	1 1/16" 10 UN	2.313"
2.875"	2.31"	40GR27500	40GS27500	40GU31200	1 1/16" 10 UN	2.313"
3.000"	2.31"	40GR27500	40GS27500	40GU31200	1 1/16" 10 UN	2.313"
3.125"	2.62"	40GR31200	40GS31200	40GU31200	1 1/16" 10 UN	2.313"
3.250"	2.62"	40GR31200	40GS31200	40GU31200	1 1/16" 10 UN	2.313"
3.313"	2.62"	40GR31200	40GS31200	40GU31200	1 1/16" 10 UN	2.313"
3.437"	2.62"	40GR31200	40GS31200	40GU31200	1 1/16" 10 UN	2.313"
3.688"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
3.813"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
3.875"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
4.000"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
4.125"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
4.313"	3.12"	40GR36800	40GS36800	40GU31200	1 1/16" 10 UN	2.313"
4.562"	4.00"	40GR45600	40GS45600	40GU45600	1 1/16" 10 UN	3.125"
4.688"	4.00"	40GR45600	40GS45600	40GU45600	1 1/16" 10 UN	3.125"
4.750"	4.00"	40GR45600	40GS45600	40GU45600	1 1/16" 10 UN	3.125"
4.813"	4.00"	40GR45600	40GS45600	40GU45600	1 1/16" 10 UN	3.125"
5.250"	4.00"	40GR45600	40GS45600	40GU45600	1 1/16" 10 UN	3.125"
5.875"	5.25"	-	40GS58700	-	1 1/16" 10 UN	3.125"
5.963"	5.25"	40GR59600	40GS59600	40GU59600	1 1/16" 10 UN	3.125"
6.250"	5.25"	40GR59600	40GS59600	40GU59600	1 1/16" 10 UN	3.125"