


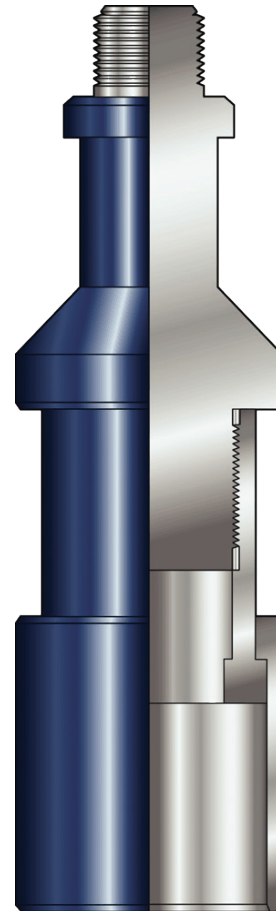
# Skirted and Bar Fishing Magnet

The Hunting Skirted Magnet is designed to retrieve ferrous debris from the top of tools in the well. The Skirted Magnet consists of a top sub body complete with fishing neck and pin connection, magnet and skirt.

The skirt is manufactured from a non-magnetic material and has two main functions, namely to prevent debris being dislodged during retrieval and to prevent hindrance during running and pulling, by keeping the magnet off the tubing wall.

Bar fishing magnets are also designed to retrieve ferrous debris from the top of tools in the well, these do not have a skirt.

 The Skirted Magnet consists of a top sub body complete with fishing neck and pin connection, magnet and skirt.



Wireline Operations - Slickline Tools

### SKIRTED FISHING MAGNET

Size Range	Fishing Neck	Connection	Part Number
1.187 - 1.375"	1.187"	15/16 -10	052MGSXXX00
1.375 - 1.500"	1.375"	15/16 -10	052MGSXXX00
1.500 - 2.000"	1.375"	15/16 -10	052MGSXXX00
2.000 - 2.500"	1.750"	1-1/16 -10	052MGSXXX00
2.500 - 4.000"	1.750"	1-1/16 -10	052MGSXXX00
4.000 - 5.500"	2.313"	1-1/16 -10	052MGSXXX00
5.500 - 6.000"	2.313"	1-9/16 -10	052MGSXXX00

4.562" Skirted Fishing Magnet would be Part No. 052MGS456200. Bespoke sizes available on request.

### BAR FISHING MAGNET

Size Range	Fishing Neck	Connection	Part Number
1.000"	0.875"	5/8 -11	052MGP-125000
1.250"	1.187"	15/16 -10	052MGP125000
1.500"	1.375"	15/16 -10	052MGP150000
1.750"	1.375"	15/16 -10	052MGP175000
2.000"	1.375"	15/16 -10	052MGP200000
2.250"	1.375"	15/16 -10	052MGP225000
2.500"	1.375"	15/16 -10	052MGP250000
2.700"	1.750"	1-1/16 -10	052MGP270000
3.500"	1.750"	1-1/16 -10	052MGP350000
4.500"	1.750"	1-1/16 -10	052MGP450000

Bespoke sizes available on request.



Available Connections

