

Wireline Roller Stem

Hunting Roller Wireline Stem Bars are designed to replace conventional stem bars for operations in deviated well bores. The rollers on the stem bar run along the underside wall of the tubing. The use of rollers greatly reduces the friction that conventional stem bars would encounter.

Roller Stem Bars are conventional sinker bars, modified with milled slots to accommodate simple roller wheels. The wheels run on high tensile steel axle bolts, which are locked in position by roll pins.


Hunting Roller Stem Bars are available in various diameters and lengths. They are supplied with industry standard pin by box connections complete with fishing necks. Wheel diameters are sized as required to suit the tubing.

When ordering, please specify required roller size.

 The use of rollers greatly reduces the friction that conventional stem bars would encounter.

WIRELINE ROLLER STEM					
Nominal Size	Fishing Neck	Connection on Tool	Length	Roller OD	Part Number
1.250"	1.000"	15/16 -10	3ft	1.375"	044STR125003
1.250"	1.000"	15/16-10	5ft	1.375"	044STR125005
1.500"	1.375"	15/16-10	2ft	1.800"	044STR150002
1.500"	1.375"	15/16-10	3ft	1.800"	044STR150003
1.500"	1.375"	15/16-10	5ft	1.800"	044STR150005
1.750"	1.375"	15/16-10	2ft	2.000"	044STR175002
1.750"	1.375"	15/16-10	3ft	2.000"	044STR175003
1.750"	1.375"	15/16-10	5ft	2.000"	044STR175005
1.875"	1.750"	1 1/16-10	2ft	2.125"	044STR187502
1.875"	1.750"	1 1/16-10	3ft	2.125"	044STR187503
1.875"	1.750"	1 1/16-10	5ft	2.125"	044STR187505
2.125"	1.750"	1 1/16-10	2ft	2.250"	044STR212502
2.125"	1.750"	1 1/16-10	3ft	2.250"	044STR212503
2.125"	1.750"	1 1/16-10	5ft	2.250"	044STR212505
2.500"	2.313"	1 9/16-10	2ft	2.875"	044STR250002
2.500"	2.313"	1 9/16-10	3ft	2.875"	044STR250003
2.500"	2.313"	1 9/16-10	5ft	2.875"	044STR250005

Table Continued Overleaf 

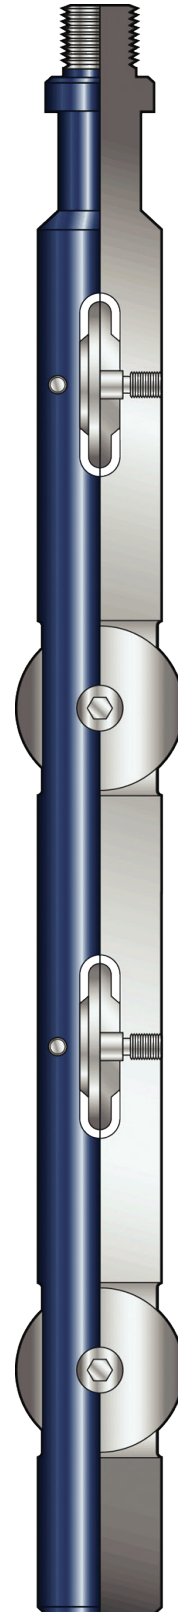

Wireline Operations - Slickline Tools




Wireline Roller Stem

WIRELINE ROLLER STEM (CONTINUED)

Nominal Size	Fishing Neck	Connection on Tool	Length	Roller OD	Part Number
1.250"	1.000"	1-1/4 Halliburton HQC	3ft	1.375"	044STR125003HQC
1.250"	1.000"	1-1/4 Halliburton HQC	5ft	1.375"	044STR125005HQC
1.500"	1.375"	1-1/2 Halliburton HQC	2ft	1.800"	044STR150002HQC
1.500"	1.375"	1-1/2 Halliburton HQC	3ft	1.800"	044STR150003HQC
1.500"	1.375"	1-1/2 Halliburton HQC	5ft	1.800"	044STR150005HQC
1.875"	1.750"	1-7/8 Halliburton HQC	2ft	2.125"	044STR187502HQC
1.875"	1.750"	1-7/8 Halliburton HQC	3ft	2.125"	044STR187503HQC
1.875"	1.750"	1-7/8 Halliburton HQC	5ft	2.125"	044STR187505HQC
2.125"	1.750"	1-7/8 Halliburton HQC	2ft	2.250"	044STR212502HQC
2.125"	1.750"	1-7/8 Halliburton HQC	3ft	2.250"	044STR212503HQC
2.125"	1.750"	1-7/8 Halliburton HQC	5ft	2.250"	044STR212505HQC
2.500"	2.313"	2-1/2 Halliburton HQC	2ft	2.875"	044STR250002HQC
2.500"	2.313"	2-1/2 Halliburton HQC	3ft	2.875"	044STR250003HQC
2.500"	2.313"	2-1/2 Halliburton HQC	5ft	2.875"	044STR250005HQC
1.500"	1.375"	1-1/2 Petrolin QLS	2ft	1.800"	QLS-152-1500-002-1-1
1.500"	1.375"	1-1/2 Petrolin QLS	3ft	1.800"	QLS-152-1500-003-1-1
1.500"	1.375"	1-1/2 Petrolin QLS	5ft	1.800"	QLS-152-1500-005-1-1
1.875"	1.750"	1-7/8 Petrolin QLS	2ft	2.125"	QLS-152-1875-002-2-2
1.875"	1.750"	1-7/8 Petrolin QLS	3ft	2.125"	QLS-152-1875-003-2-2
1.875"	1.750"	1-7/8 Petrolin QLS	5ft	2.125"	QLS-152-1875-005-2-2
2.125"	1.750"	2-1/8 Petrolin QLS	2ft	2.250"	QLS-152-2125-002-2-2
2.125"	1.750"	2-1/8 Petrolin QLS	3ft	2.250"	QLS-152-2125-003-2-2
2.125"	1.750"	2-1/8 Petrolin QLS	5ft	2.250"	QLS-152-2125-005-2-2
2.500"	2.313"	2-1/2 Petrolin QLS	2ft	2.875"	QLS-152-2500-002-3-3
2.500"	2.313"	2-1/2 Petrolin QLS	3ft	2.875"	QLS-152-2500-003-3-3
2.500"	2.313"	2-1/2 Petrolin QLS	5ft	2.875"	QLS-152-2500-005-3-3

Bespoke Roller OD's available on request

 Hunting Roller Stem Bars are available in various diameters and lengths. They are supplied with industry standard pin by box connections complete with fishing necks. Wheel diameters are sized as required to suit the tubing.



Available Connections

